


## Vertical Indicator Post (IP), UL/FM Approved



IP

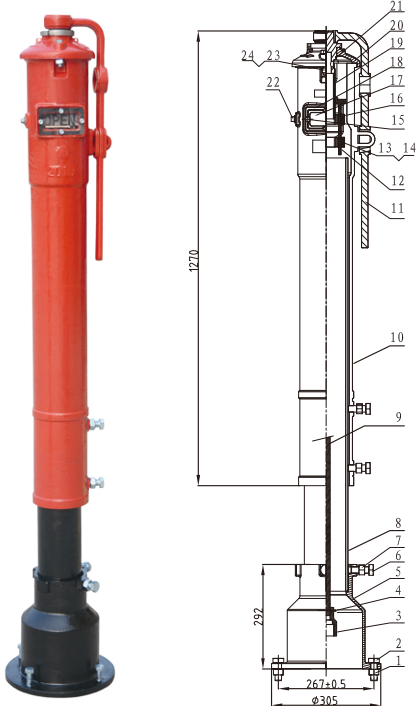

- **Statement:**  
Vertical indicator post provides a means to operate a buried or otherwise inaccessible valve and able to indicate the open or shut position of the valve.
- **Coating:**  
Fusion Bonded Epoxy Coating in accordance with ANSI/AWWA C550

### MATERIAL SPECIFICATION

| Part No. | Part                | Standard Specification                      | Options            |
|----------|---------------------|---|--------------------|
| 1        | Hex Nut             | Carbon Steel Zinc Plated                    | AISI 304, AISI 316 |
| 2        | Hex Bolt            | Carbon Steel Zinc Plated                    | AISI 304, AISI 316 |
| 3        | Socket              | ASTM A536, 65-45-12                         |                    |
| 4        | Cotter Pin          | AISI 304                                    |                    |
| 5        | Base Flange         | ASTM A536, 65-45-12                         |                    |
| 6        | Hex Bolt            | Carbon Steel Zinc Plated                    | AISI 304, AISI 316 |
| 7        | Hex Nut             | Carbon Steel Zinc Plated                    | AISI 304, AISI 316 |
| 8        | Standpipe           | Carbon Steel ASTM A53                       |                    |
| 9        | Stem 1" Square      | Carbon Steel AISI 1045                      |                    |
| 10       | Body                | ASTM A536, 65-45-12                         |                    |
| 11       | Locking Wrench      | ASTM A536, 65-45-12                         |                    |
| 12       | Target Carrier Nut  | AISI 304 (DN100-400)<br>HPb59-1 (DN450-600) |                    |
| 13       | Hex Bolt            | Carbon Steel Zinc Plated                    | AISI 304, AISI 316 |
| 14       | Hex Nut             | Carbon Steel Zinc Plated                    | AISI 304, AISI 316 |
| 15       | Hex Bolt            | Carbon Steel Zinc Plated                    | AISI 304, AISI 316 |
| 16       | Instructs The Plane | ASTM A536, 65-45-12                         |                    |
| 17       | Window Class        | Plexiglass                                  |                    |
| 18       | Gasket              | EPDM  |                    |
| 19       | Operating NUT       | AISI 304                                    |                    |
| 20       | Top Section         | ASTM A536, 65-45-12                         |                    |
| 21       | Snap Ring           | Stainless Steel AISI1066                    |                    |
| 22       | Plug                | Malleable Rion Galvanized                   |                    |
| 23       | Square Nut          | Carbon Steel Zinc Plated                    | AISI 304, AISI 316 |
| 24       | Hex Bolt            | Carbon Steel Zinc Plated                    | AISI 304, AISI 316 |

### Field Adjustment:

- 1.Remove the Top Section from the top of the Indicator Post assembly;
- 2.Cut the required stem length and adjust the Standpipe to match up to the ground line;
- 3.Set the "OPEN" and "SHUT" targets for the appropriate valve size;
- 4.Reattach the Top Section to the top of the Indicator Post assembly.